


<b>Three-phase Motor Type*</b>	1TZ9003-1BC22-2_A4	6pole			
<b>Area</b>	Safe Area				
<b>Environmental Conditions</b>	-20°C to +40°C, up to 1000 metres above sea level				
<b>Rated Voltage</b>	230/400V 50Hz, 460VY 60Hz				
<b>Output at 50Hz</b>	2.2 kW				
<b>Output at 60Hz</b>	2.55 kW				
<b>Frame Size</b>	112M Aluminium frame, cast iron endshields/flanges				
<b>Speed at 50Hz</b>	970 rpm				
<b>Speed at 60Hz</b>	1170 rpm				
<b>Current at 380V 50Hz</b>	5.A				
<b>Current at 400V 50Hz</b>	4.7A				
<b>Current at 415V 50Hz</b>	4.5A				
<b>Current at 460V 60Hz</b>	4.75A				
<b>Efficiency Class (at 50Hz)</b>	IE3				
<b>Percentage Load</b>	<b>125%</b>	<b>100%</b>	<b>75%</b>	<b>50%</b>	<b>25%</b>
<b>Efficiency at 50Hz</b>	82.8%	<b>84.3%</b>	84.3%	83.3%	74.3%
<b>Efficiency at 60Hz</b>	86.1%	<b>87.5%</b>	88.0%	86.9%	80.7%
<b>Power factor (cos fi) at 50Hz</b>	0.81	<b>0.80</b>	0.75	0.65	0.40
<b>Power factor (cos fi) at 60Hz</b>	0.80	<b>0.77</b>	0.70	0.58	0.37
<b>Rated Torque at 50Hz</b>	22. Nm				
<b>Rated Torque at 60Hz</b>	21. Nm				
<b>Duty Cycle</b>	S1				
<b>Starting Current Ratio</b>	6.6 (50Hz)				
<b>Starting Torque Ratio</b>	1.7 (50Hz)				
<b>Breakdown Torque Ratio</b>	2.8 (50Hz)				
<b>Internal Protection / Cooling</b>	IP55 / IC411 (TEFC)				
<b>Insulation Class</b>	F (155°C), temperature rise B (80k)				
<b>Acoustic Pressure</b>	59 dB(A) at 50Hz speed / 63 dB(A) at 60Hz speed				
<b>Standard Mountings</b>	B3, B5, B3/B5, B14A, B3/B14A, B14B, B3/B14B				
<b>Weight</b>	29. kg				
<b>Moment of Inertia</b>	0.014 kgm <sup>2</sup>				
<b>Bearing DE/NDE</b>	6306 2Z C3 / 6306 2Z C3 (Bearing located at NDE)				
<b>Bearing Lubrication</b>	Esso Unirex N3				

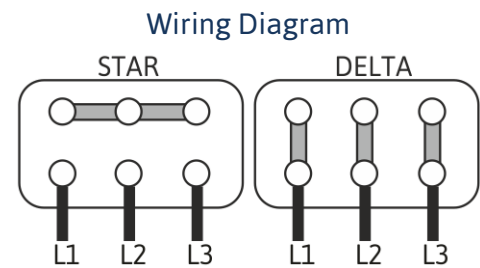

\*The 16th digit of the Type Number denominates the motor mounting.