


Three-phase Motor Type*	1TZ9503-3AA53-4_A4	2pole			
Area	Safe Area				
Environmental Conditions	-20°C to +40°C, up to 1000 metres above sea level				
Rated Voltage	400/690V 50Hz, 460VD 60Hz				
Output at 50Hz	200. kW				
Output at 60Hz	224. kW				
Frame Size	315L cast iron				
Speed at 50Hz	2982 rpm				
Speed at 60Hz	3582 rpm				
Current at 380V 50Hz	345.A				
Current at 400V 50Hz	330.A				
Current at 415V 50Hz	316.A				
Current at 460V 60Hz	320.A				
Efficiency Class (at 50Hz)	IE3				
Percentage Load	125%	100%	75%	50%	25%
Efficiency at 50Hz	95.5%	95.8%	95.9%	95.5%	93.6%
Efficiency at 60Hz	95.5%	95.8%	95.9%	95.4%	92.6%
Power factor (cos fi) at 50Hz	0.92	0.92	0.91	0.87	0.76
Power factor (cos fi) at 60Hz	0.91	0.92	0.92	0.88	0.77
Rated Torque at 50Hz	640. Nm				
Rated Torque at 60Hz	597. Nm				
Duty Cycle	S1				
Starting Current Ratio	7.2 (50Hz)				
Starting Torque Ratio	2.5 (50Hz)				
Breakdown Torque Ratio	3.0 (50Hz)				
Internal Protection / Cooling	IP55 / IC411 (TEFC)				
Insulation Class	F (155°C), temperature rise B (80k)				
Acoustic Pressure	76 dB(A) at 50Hz speed / 81 dB(A) at 60Hz speed				
Standard Mountings	B3, B3/B5, V1				
Weight	1150. kg				
Moment of Inertia	2.3 kgm ²				
Bearing DE/NDE	6316 C3 / 6316 C3 (Bearing located at NDE)				
Bearing Lubrication	Esso Unirex N3				

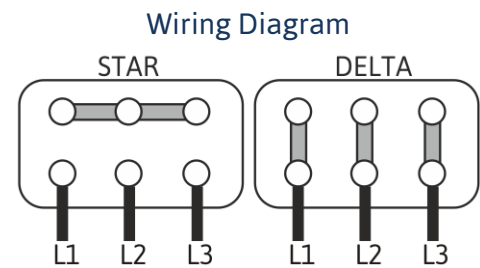

*The 16th digit of the Type Number denominates the motor mounting.