


Three-phase Motor Type*	1TZ9503-2AC53-4_A4	6pole			
Area	Safe Area				
Environmental Conditions	-20°C to +40°C, up to 1000 metres above sea level				
Rated Voltage	400/690V 50Hz, 460VD 60Hz				
Output at 50Hz	22. kW				
Output at 60Hz	26.5 kW				
Frame Size	200L cast iron				
Speed at 50Hz	978 rpm				
Speed at 60Hz	1175 rpm				
Current at 380V 50Hz	45.9A				
Current at 400V 50Hz	43.5A				
Current at 415V 50Hz	42.1A				
Current at 460V 60Hz	44.A				
Efficiency Class (at 50Hz)	IE3				
Percentage Load	125%	100%	75%	50%	25%
Efficiency at 50Hz	90.9%	92.2%	93.1%	93.2%	91.0%
Efficiency at 60Hz	91.6%	93.0%	94.0%	94.3%	92.5%
Power factor (cos fi) at 50Hz	0.81	0.79	0.74	0.64	0.43
Power factor (cos fi) at 60Hz	0.82	0.81	0.77	0.68	0.47
Rated Torque at 50Hz	215. Nm				
Rated Torque at 60Hz	215. Nm				
Duty Cycle	S1				
Starting Current Ratio	5.6 (50Hz)				
Starting Torque Ratio	2.5 (50Hz)				
Breakdown Torque Ratio	2.6 (50Hz)				
Internal Protection / Cooling	IP55 / IC411 (TEFC)				
Insulation Class	F (155°C), temperature rise B (80k)				
Acoustic Pressure	61 dB(A) at 50Hz speed / 63 dB(A) at 60Hz speed				
Standard Mountings	B3, B5, B3/B5				
Weight	230. kg				
Moment of Inertia	0.32 kgm ²				
Bearing DE/NDE	6312 Z C3 / 6312 Z C3 (Bearing located at NDE)				
Bearing Lubrication	Esso Unirex N3				

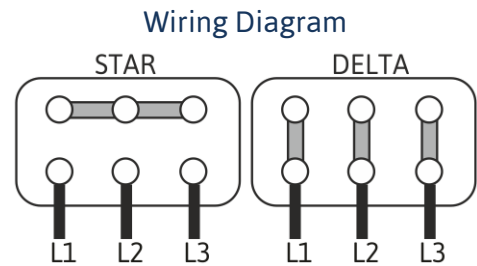

*The 16th digit of the Type Number denominates the motor mounting.